



AirLink iLife Inc.

No. 13 Aly. 2, Ln. 50-6, Sec. 2, Changping Rd., Beitun Dist.,

Taichung City 406, Taiwan (R.O.C.)

Tel: '+886-4-24221524

E: info@airlink-ilife.com


W: www.airlink-ilife.com

Product List

APP : Tuya or Smart Life



Product Number	Product Picture	Description	Resolution	Remark
Smart Home Kits		APP: Tuya or Smart Life		
Pack-A	System & Sensors all based at 2.4GHz AS-25TU AS-01TU S15-TU S21-TU	2.0MP Door cam *1 2.0MP Camera *2 Smoke detector *1 Door Sensors *2		System all in 2.4GHz
Pack-B	Camera in 2.4GHz & Sensors at 2.4GHz AS-25TU AS-01TU Build in with RF 433 module support max 99 sensors 433 MHz sensors	2.0MP Door cam *1 2.0MP Camera *2 Smoke detector *1 Door Sensors *2		Sensors 433MHZ

Pack-C	 System & Sensors all based at 2.4GHz	1.0MP Door cam + 4.3"LCD *1 2.0MP Camera *2 Smoke detector *1 Door Sensors *2 gift box 28*20*8.5cm		System all in 2.4GHz
Pack-D	 AS-01TU Build in with RF 433 module support max 99 sensors 1 *SOS Alarm Sensor 1 * door & window alarm sensor 1 * flood/leak detector 1 x smoke alarm sensor 1 x PIR Motion sensor 1 *Carbon monoxide alarm	2.0MP Camera *1 SOS alarm sensor *1 Smoke detector *1 PIR motion sensor *1 Carbon monoxide alarm *1 Door Sensors *1 Flood/ leak detector *1		Sensors 433MHZ
Accessories-D	 Sensors at 2.4GHz	Smoke detector *1 Door Sensors *2 gift box 12*12*6 cm		Sensors 2.4GHz
Indoor PT PAN 355 Degree Support Max. 128G/Two-way Audio				
AS-01TU		Build in with RF 433 module support max 99 sensors Lens 3.6mm / Wi-Fi/802.11/b/g/n / Power Input DC 5V1A (Included)	2.0MP(1920*1080P)	
AS-02TU		Clock camera Lens 3.6mm Wi-Fi/802.11/b/g/n / Power Input DC 5V1A (Included)battery capacity 5000mah Charging interface : type C	2.0MP(1920*1080P)	
AS-21TU		Lens 3.6mm / Wi-Fi/802.11/b/g/n / Power Input DC 5V1A (Included)	2.0MP(1920*1080P)	

AS-24TU		2.8mm Lens , IR distance 6-8M Low power smart WiFi video doorbell,166° wide viewing angle Support PIR motion detection,alarm push to mobilephoneSupport 2.4G Wi-Fi connectionBattery *2 18650 Li-ion 2600mah	2.0MP(1920*1080P)	
AS-25TU		2.8mm Lens , IR distance 6-8M Low power smart WiFi video doorbell,166° wide viewing angle Support PIR motion detection,alarm push to mobilephoneSupport 2.4G Wi-Fi connectionBattery *2 18650 Li-ion 2600mah	2.0MP(1920*1080P)	
AS-26TU		Door display 4.3" LCD screen Support remote call Built in 5000mAh Li-ion Support local storage Max 32GB Camera 1.0MP 720P Viewing angle 160 wide angle PIR motion detection	1.0MP(720P)	
Outdoor Bullet Two-Way Audio Motion Detection Smart Wireless IP Camera Support Max. 128G				
AS-04TU		Lens 3.6mm/Wi-Fi/802.11/b/g/n Two-way Audio/External SD Card Slot	2.0MP(1920*1080P)	
AS-05TU		Lens 3.6mm/Wi-Fi/802.11/b/g/n Two-way Audio/External SD Card Slot	2.0MP(1920*1080P)	
AS-06TU		Lens 3.6mm/Wi-Fi/802.11/b/g/n Two-way Audio/External SD Card Slot	2.0MP(1920*1080P)	
AS-07TU		Lens 3.6mm/Wi-Fi/802.11/b/g/n Two-way Audio/External SD Card Slot	2.0MP(1920*1080P)	

Dome Fixed Lens Motion Detection Wireless IP Camera Support Max. 128G/Two-way Audio				
AS-08TU		Lens 3.6mm/Wi-Fi/802.11/b/g/n Two-way Audio/Internal SD Card Slot	2.0MP(1920*1080P)	
AS-09TU		Lens 3.6mm/Wi-Fi/802.11/b/g/n Two-way Audio/Internal SD Card Slot	2.0MP(1920*1080P)	
Outdoor PT PAN Moving 355 Degree Support Max. 128G/Two-way Audio				
AS-10TU		Lens 4mm/Wi-Fi/802.11/b/g/n Two-way Audio/Internal SD Card Slot	2.0MP(1920*1080P)	
AS-11TU		Lens 4mm/Wi-Fi/802.11/b/g/n Two-way Audio/Internal SD Card Slot	2.0MP(1920*1080P)	
Outdoor PT Zoom Moving 355 Degree Support Max. 128G/Two-way Audio				
AS-12TU		4 x Zoom 2.8-12mm /Wi-Fi/802.11/b/g/n Two-way Audio/Internal SD Card Slot	2.0MP(1920*1080P)	



AS-13TU		4 x Zoom 2.8-12mm /Wi-Fi/802.11/b/g/n Two-way Audio/Internal SD Card Slot	2.0MP(1920*1080P)	
Battery WiFi PIR Camera Support Max. 128G/Two-way Audio				
AS-14TU		6mm HD Fixed Lens, IR Dual Filter Switching 20m effective infrared distance Battery 4 PCS of 21700 batteries 20000MAh Solar power 8W5V200mA Supports wide dynamics, 3D noise reduction, image flipping, motion tracking Support two-way voice intercom, alarm push, mobile phone real-time video ultra-low power consumption. Support voice 3.6 intercom, Pir + radar dual induction alarm recording	2.0MP(1920*1080P)	
AS-17TU		Outdoor Lens 3.6mm/Wi-Fi/802.11/b/g/n Two-way Audio/Internal SD Card Slot Built-in battery 5200mA In standby mode 5 months 10 times trigger/ day 2 months	2.0MP(1920*1080P)	3.5W Solar
AS-15TU		3.6mm HD Fixed Lens, IR Dual Filter Switching 20m effective infrared distance Battery 4 PCS of 18650 batteries 7200MAh Solar power 5.5W5V200mA Supports wide dynamics, 3D noise reduction, image flipping, motion tracking Support two-way voice intercom, alarm push, mobile phone real-time video ultra-low power consumption. Support voice 3.6 intercom, Pir + radar dual induction alarm recording	2.0MP(1920*1080P)	

AS-16TU		3.6mm HD Fixed Lens, IR Dual Filter Switching 20m effective infrared distance Battery 3 PCS of 18650 batteries 16200MAh Solar power 6W5V200mA Supports wide dynamics, 3D noise reduction, image flipping, motion tracking Support two-way voice intercom, alarm push, mobile phone real-time video ultra-low power consumption. Support voice 3.6 intercom, Pir + radar dual induction alarm recording	2.0MP(1920*1080P)	
Option: 1) Built-in 16GB TF Card(+\$4) 2) Built-in 32GB TF Card(+\$6) 3) Alexa & Google Home (+\$3) 4) Qty less 100PCS (+\$2)				
4G PIR Solar Battery Camera Support Max. 256G/Two-way Audio				
ASP-14TU		3.6mm HD Fixed Lens, IR Dual Filter Switching 20m effective infrared distance Battery 4 PCS of 21700 batteries 20000MAh Solar power 8W5V200mA Supports wide dynamics, 3D noise reduction, image flipping, motion tracking Support two-way voice intercom, alarm push, mobile phone real-time video ultra-low power consumption. Support voice 3.6 intercom, Pir + radar dual induction alarm recording	2.0MP(1920*1080P)	
ASP-17TU		Outdoor Lens 3.6mm/Wi-Fi/802.11/b/g/n Two-way Audio/Internal SD Card Slot Built-in battery 5200mA In standby mode 5 months 10 times trigger/ day 2 months	2.0MP(1920*1080P)	3.5W Solar +7.8

ASP-15TU		3.6mm HD Fixed Lens, IR Dual Filter Switching 20m effective infrared distance Battery 4 PCS of 18650 batteries 7200MAh Solar power 5.5W5V200mA Supports wide dynamics, 3D noise reduction, image flipping, motion tracking Support two-way voice intercom, alarm push, mobile phone real-time video ultra-low power consumption. Support voice 3.6 intercom, Pir + radar dual induction alarm recording	2.0MP(1920*1080P)	
Wireless NVR Kit P2P HD Outdoor IR CUT Security IP Camera WIFI CCTV System				
AS-18TU		H.265 4CH Wi-Fi IP Camera KIT * Picture display:1/4 * WiFi range: max 120m(open filed), Support cascade for more range * 1 SATA(max.4T) * Video output:1ch HDMI,1ch VGA,1RJ45,1USB2.0 ,2 wifi antenna * 4ch playback * 1/4" CMOS,15fps * Lens:3.6mm fixed(4mm optional),Max.IR distance:30M * Day/Night(ICR),3DNR,AGC,BLC * Mobile viewing, iphone&android app * 4ch Wi-Fi NVR X 1 (w/o HDD) * USB Mouse X 1 * User Manual X1 * Wi-Fi IP Cameras X 4 * Network cable X 1 * DC12V 1A adapter X4 * DC12V 2A adapter X1 * A bag of screws	2.0MP(1920*1080P)	

AS-19TU		H.265 8CH Wi-Fi IP Camera KIT * Picture display:1/8 * WiFi range: max 120m(open filed) * 1 SATA(max.2TB) * Video output:1ch HDMI,1ch VGA,1RJ45,1USB2.0 ,2 wifi antenna * 8ch playback * 1/4" CMOS,15fps * Lens:3.6mm fixed(4mm optional),Max.IR distance:30M * Day/Night(ICR),3DNR,AGC,BLC * Mobile viewing, iphone&android app * 8ch Wi-Fi NVR X 1 (not HDD) * USB Mouse X 1 * User Manual X1 * Wi-Fi IP Cameras X 8 * Network cable X 1 * DC12V 1A adapter X8 * DC12V 2A adapter X1	2.0MP(1920*1080P)	
AS-20TU		H.265 8CH Wi-Fi IP Camera KIT * Picture display:1/8 * WiFi range: max 120m(open filed) * 1 SATA(max.2TB) * Video output:1ch HDMI,1ch VGA,1RJ45,1USB2.0 ,2 wifi antenna * 8ch playback * 1/4" CMOS,15fps * Lens:3.6mm fixed(4mm optional),Max.IR distance:30M * Day/Night(ICR),3DNR,AGC,BLC * Mobile viewing, iphone&android app * 8ch Wi-Fi NVR X 1 (not HDD) * USB Mouse X 1 * User Manual X1 * Wi-Fi IP Cameras X 8 * Network cable X 1 * DC12V 1A adapter X8 * DC12V 2A adapter X1	2.0MP(1920*1080P)	

AS-22TU		H.265 8CH Wi-Fi IP Camera KIT * Picture display:1/8 * WiFi range: max 120m(open filed) * 1 SATA(max.2TB) * Video output:1ch HDMI,1ch VGA,1RJ45,1USB2.0 ,2 wifi antenna * 8ch playback * 1/4" CMOS,15fps * Lens:3.6mm fixed(4mm optional),Max.IR distance:30M * Day/Night(ICR),3DNR,AGC,BLC * Mobile viewing, iphone&android app * 12.5" LCD display 8ch Wi-Fi NVR X 1 (not HDD) * USB Mouse X 1 * User Manual X1 * Wi-Fi IP Cameras X 8 * Network cable X 1 * DC12V 1A adapter X8 * DC12V 2A adapter X1	3.0MP	
AS-23TU		H.265 8CH Wi-Fi IP Camera KIT * Picture display:1/8 * WiFi range: max 120m(open filed) * 1 SATA(max.2TB) * Video output:1ch HDMI,1ch VGA,1RJ45,1USB2.0 ,2 wifi antenna * 8ch playback * 1/4" CMOS,15fps * Lens:3.6mm fixed(4mm optional),Max.IR distance:30M * Day/Night(ICR),3DNR,AGC,BLC * Mobile viewing, iphone&android app * 8ch Wi-Fi NVR X 1 (not HDD) * USB Mouse X 1 * User Manual X1 * Wi-Fi IP Cameras X 8 * Network cable X 1 * DC12V 1A adapter X8	5.0MP	
Option: 1) 1TB Hard disk(+\$65) 2) 2TB Hard disk(+\$85)				
Wireless Sensors -Socket				

S1-TU		Electricity statistics Power supply: AC100-240V 50/60Hz Max Load: 10A Working temperature: -20-50C	2.4GHz	
S2-TU		Power supply: AC100-240V 50/60Hz Max Load: 10A with 2 of USB charge port Working temperature: -20-50C	2.4GHz	
S3-TU		US Type Power supply: AC110-240V 50/60Hz Max Load: 10A Working temperature: -20-50C	2.4GHz	
S4-TU		Electricity statistics UK Power supply: AC110-240V 50/60Hz Max Load: 16A Working temperature: -20-50C	2.4GHz	
S5-TU		Electricity statistics EU Power supply: AC110-240V 50/60Hz Max Load: 16A Working temperature: -20-50C	2.4GHz	
S6-TU		Breaker: AC110-240V 50/60Hz Max Load: 10A 2400W Working temperature: -20-50C	2.4GHz	
Wireless Sensors - Smart switch module				
S7-TU		Curtain Module	2.4GHz	
S8-TU		Light Switch WiFi+RF433 Module	2.4GHz + RF433	
S9-TU		Dimmer WiFi+RF433 Module	2.4GHz + RF433	

Wireless Sensors - PIR Motion				
S10-TU		Battery:CR123A x 1 Standby current:13uAStandby time:5yearsUse time:1 year(25times/day);2years(10/times/day)Sensitivity distance:7mSensitive angle:120° Wireless range:45m Operating Temperature:0°C~40°C(32°F~140°F)Operating humidity:20%~85%Storage Temperature:0°C~60°C(32°F~140°F)Storage Humidity:0%~90%	2.4GHz	
S11-TU		Battery:CR123A x 1 Standby current:13uAStandby time:5yearsUse time:1 year(25times/day);2years(10/times/day)Sensitivity distance:7mSensitive angle:120° Wireless range:45m Operating Temperature:0°C~40°C(32°F~140°F)Operating humidity:20%~85%Storage Temperature:0°C~60°C(32°F~140°F)Storage Humidity:0%~90%	2.4GHz	
S12-TU		Battery:CR123A x 1 Standby current:13uAStandby time:5yearsUse time:1 year(25times/day);2years(10/times/day)Sensitivity distance:7mSensitive angle:120° Wireless range:45m Operating Temperature:0°C~40°C(32°F~140°F)Operating humidity:20%~85%Storage Temperature:0°C~60°C(32°F~140°F)Storage Humidity:0%~90%	2.4GHz	
S13-TU		Battery:CR123A x 1 Standby current:13uAStandby time:5yearsUse time:1 year(25times/day);2years(10/times/day)Sensitivity distance:7mSensitive angle:120° Wireless range:45m Operating Temperature:0°C~40°C(32°F~140°F)Operating humidity:20%~85%Storage Temperature:0°C~60°C(32°F~140°F)Storage Humidity:0%~90%	2.4GHz	


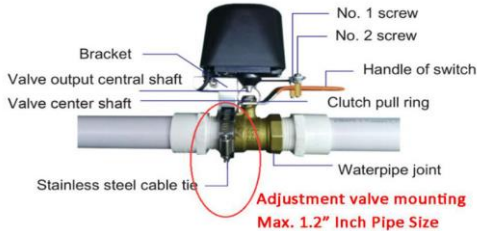
- 1) Battery not include
2) Qty less 100PCS (+\$2.5)

Wireless Door Sensors

S14-TU		Battery: AAA1.5V x 2 Standby current: ≤5uA Protocol: IEEE 802.11b/g/n Wireless Range: 50m Operating Temperature: -10°C ~ 40°C (14°F ~ 104°F) Operating Humidity: 20% ~ 85% Storage Temperature: -10°C ~ 60°C (14°F ~ 140°F) Storage Humidity: 0% ~ 90%	2.4GHz	
S15-TU		Battery: AAA1.5V x 2 Standby current: ≤5uA Protocol: IEEE 802.11b/g/n Wireless Range: 50m Operating Temperature: -10°C ~ 40°C (14°F ~ 104°F) Operating Humidity: 20% ~ 85% Storage Temperature: -10°C ~ 60°C (14°F ~ 140°F) Storage Humidity: 0% ~ 90%	2.4GHz	
S16-TU		Battery: AAA1.5V x 2 Standby current: ≤5uA Protocol: IEEE 802.11b/g/n Wireless Range: 50m Operating Temperature: -10°C ~ 40°C (14°F ~ 104°F) Operating Humidity: 20% ~ 85% Storage Temperature: -10°C ~ 60°C (14°F ~ 140°F) Storage Humidity: 0% ~ 90%	2.4GHz	
Wireless Sensors -Siren Alarm				
S17-TU		Power supply: Mini USB , 5V-1A Backup power supply: CR123A x 2 (optional) Sound intensity:120 dB Wireless Type:2.4GHz Protocol:IEEE 802.11b/g/n Wireless Range:45m Operating Temperature:0°C ~ 60°C (32°F ~ 104°F)	2.4GHz	

S34-TU		Outdoor WiFi Siren solar power 5V0.6W Battery 3.7V600mAh Detection range 9-12M	2.4GHz	
S35-TU		Outdoor WiFi Siren solar power 5V0.6W Battery 3.7V600mAh Detection range 9-12M	433MHz	
SG-TU		WiFi Siren Gateway support max 24 sensors Package Standard kit: 1* Host 1* Remote controls 2* Infrared 2* Door sensor 1* Power supply 1* Manual	2.4GHz	Sensors 433MHZ
Wireless Sensors -Smoke Detector				
S18-TU		Power supply: 1.5VAA x 2pcs Standby Current: <10 uA Work Current(Smoke Alarm): Max 100mA Sound intensity:85dB/3m Operating Temperature: 0°C~ 40°C	2.4GHz	
S19-TU		Power supply:DC9V(6F22 battery) Standby Current: 25uA Work Current(Smoke Alarm): Max 100mA Sound intensity:<=110 dB Operating Temperature: -10°C~ 60°C (32°F~104°F) Size (D x W x H): 100mm x 100mm x 32mm	2.4GHz	

S20-TU		Power supply: 1.5VAA x 2pcs DC3V LR03 Standby Current: <15 uA Work Current(Smoke Alarm): Max 160mA Low-voltage notification <2.4V Sound intensity:80dB/1m Operating Temperature: 0°C~ 40°C	2.4GHz	
S21-TU		Standby Current: <15μA Battery Specification: 9V(1 year standby) Alarm Indication: Red Led Flash Sound Level: 80dB/M Operating Temperature: -10°C- 55°C Operating Humidity: <95%RH Detecting Area: 20 Sqare Mete Dimensions: φ107mm x 50mm	2.4GHz	
S33-TU		Power supply: 1.5VAA x 2pcs Standby Current: <10 uA Work Current(Smoke Alarm): Max 100mA Sound intensity:85dB/3m Operating Temperature: 0°C~ 40°C	2.4GHz	Smoke detector + Carbon monoxide
Wireless Sensors -Gas alarm leak detector				
S22-TU		Input voltage: DC 5V (micro USB interface) Working current: ≤150mA Response time: ≤30s Alarm Sound: ≥85dB Installation type: wall or celling mounting Air pressure: 86~106Kpa Working Temperature: 0°C~55 °C Work Humidity: ≤80%RH, no freezing Item Size: Approx. 10.2 * 10.2 * 3.5cm (L*W*H)	2.4GHz	
Wireless Sensors -Water leak detector				

S23-TU		Input voltage: DC3V LR03 Battery: 2 * AAA battery Static current: $\leq 10\mu A$ Alarm current: $\leq 160mA$ Low-voltage indication: ≤ 2 . Installation method: Wall-mounted Working temperature: $-10-50^{\circ}C$ Working humidity: 95%RH	2.4GHz	
S24-TU		Input voltage: 5V DC1A Battery: 3.7V Li-ion 450mAH battery Static current: $\leq 2\mu A$ Alarm current: $\leq 130mA$ Working temperature: $-20-85^{\circ}C$ Working humidity: 95%RH Size: 69*72*20mm	2.4GHz	
S25-TU		Input voltage: 5V DC1A Battery: 3.7V Li-ion 3000mAH battery Static current: $\leq 2\mu A$ Alarm current: $\leq 130mA$ Working temperature: $-10-50^{\circ}C$ Working humidity: 95%RH Size: 100*70*45mm	2.4GHz	
Wireless Sensors -Valve manipulator (Great Solution with Water leak detector / Smoke detector/ Gas detector linkage)				
S26-TU			2.4GHz	Include 12V DC Power
Wireless Sensors -Elder Care				

S27-TU		SOS emergency button Input voltage: USB 5V1A Battery: 3.6V 120mAh (rechargeable battery) Standby current: <50 ua Working current: <70 ma Standby time: 1 year Power: 0.2 w Working temperature: -20 ~ 55°C Humidity: 20 ~ 95%	2.4GHz	
Wireless LED Strip Light / Outdoor				
S28-TU		Input power : 12V1A 5050 single IC each of 150 pcs LED / 5M/20W Color Temperature :6500K + RGBLuminous Include controller and power suply	2.4GHz	
S29-TU		Input power : 12V1A 5050 single IC each of 300 pcs LED / 10M/40W Color Temperature :6500K + RGBLuminous Include controller and power suply	2.4GHz	
Gateway - Bluetooth & Zigbee combo				
S30-TU		Input voltage: USB 5V1A Network:2.4GHz&Zigbee&BLE&Mesh (connect with wide sensors both in bluetooth and zigbee) Working temperature: -10 ~ 45°C Humidity: 5 ~ 90% Size: 92*92*40mm	2.4GHz & Zigbee &BLE & Mesh	
Sensors-SOS				
S31-TU		Wide use working with detect opening/closing, movement, water, fire etc Working temperature: -20-60°C Emission frequency: 100dBm Quiescent current : 2~3uA Wireless frequency : Zigbee 2.4GHz Battery : CR2032 Working humidity: =95%RH (non-condensing)	Zigbee	

S32-TU		Anti-Loss Find your carry-on Location record Replaceable battery Battery CR2032 200mAh(stand by 1 year) Bluetooth 5.0 Wireless distance outdoor 50M Size 41*37*8.3mm	Bluetooth	
Smart Home 2.4GHz WiFi / GSM Combo Gateway + 433MHz				
SHG02		Package Standard kit: 1*Alarm Panel. 1*PIR Detector. 1*A pair of Door Magnetic 2*Remote Control. 1*Power Adapter. 1*User Manual.	2.4GHz & GSM	Sensors 433MHZ
SHG03(white or Black)		Package Standard kit: 1* Host 2* Remote controls 1* Infrared 1* Door sensor 1* Power supply 1* Manual	2.4GHz & GSM	Sensors 433MHZ
Universal Infrared Remote Control				